


Self-Propelled Scissor Lift

Model : DS-1212

Address : PAP-A-5/4/5, Chakan Industrial Area, Phase-4, Nigoje Village, Tal - Khed, Pune - 410501
 Contact: +91 7507364790/9011067039 Email: marketing2@daedalusind.com/a.mayur@daedalusind.com


Specifications

| Models | | DS-1212 | |
|-------------------------|-------------------|---------|---------|
| Measurements | | Feet | Metric |
| Maximum Working Height* | A | 39 ft | 12 m |
| Maximum Platform Height | B | 32 ft | 10 m |
| Lowered Platform Height | C | 5.0 ft | 1.55 m |
| Platform Length - | Without Extension | D | 7.9 ft |
| | With Extension | E | 10.8 ft |
| Extension Deck | F | 2.9 ft | 0.9 m |
| Platform Width | G | 3.9 ft | 1.2 m |
| Guardrail Height | H | 3.2 ft | 1.0 m |
| Vehicle Dimensions | Height | I | 8.5 ft |
| | Length | J | 8.2 ft |
| | Width | K | 4.1 ft |
| Ground Clearance | | 0.3 ft | 90 mm |

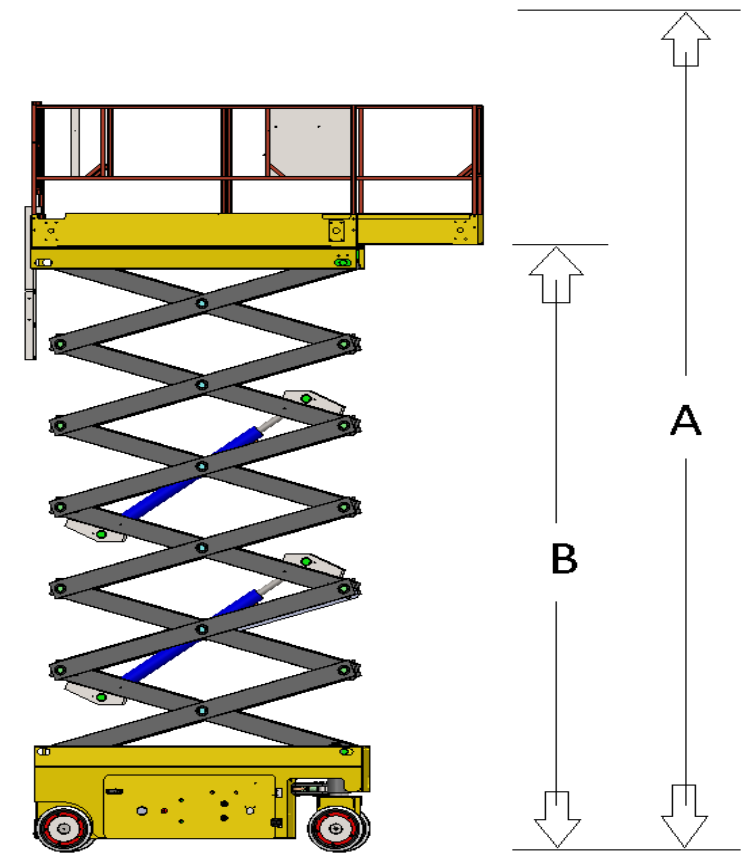

Productivity

| | |
|---------------------------|---|
| Maximum Occupancy** | 2 People |
| Lift Capacity | 350 Kgs |
| Extension Deck Capacity | 125 Kgs |
| Drive Speed | 2.5 Kmph |
| Turning Radius - Outside | 2.6 m |
| Raise / Lower Height | 60 / 65 |
| Control | Proportional Control |
| Drive | Dual Front Wheel Hydraulic Drive |
| Brakes | Rear Spring Applied Hydraulic Release Brake |
| Tyres (Solid Non-Marking) | 323 X 100 |

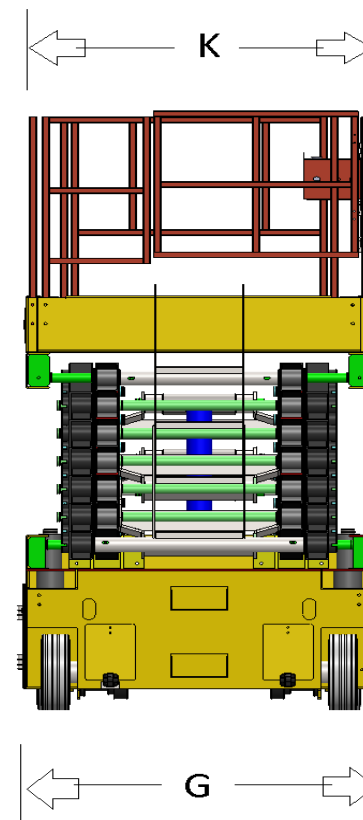

Power

| | |
|--------------------|----------------------------------|
| Power Source | 24V DC (Four 6V 225Ah Batteries) |
| Hydraulic Capacity | 20L (5.2 gal) |
| Weight*** | 2400 Kgs |

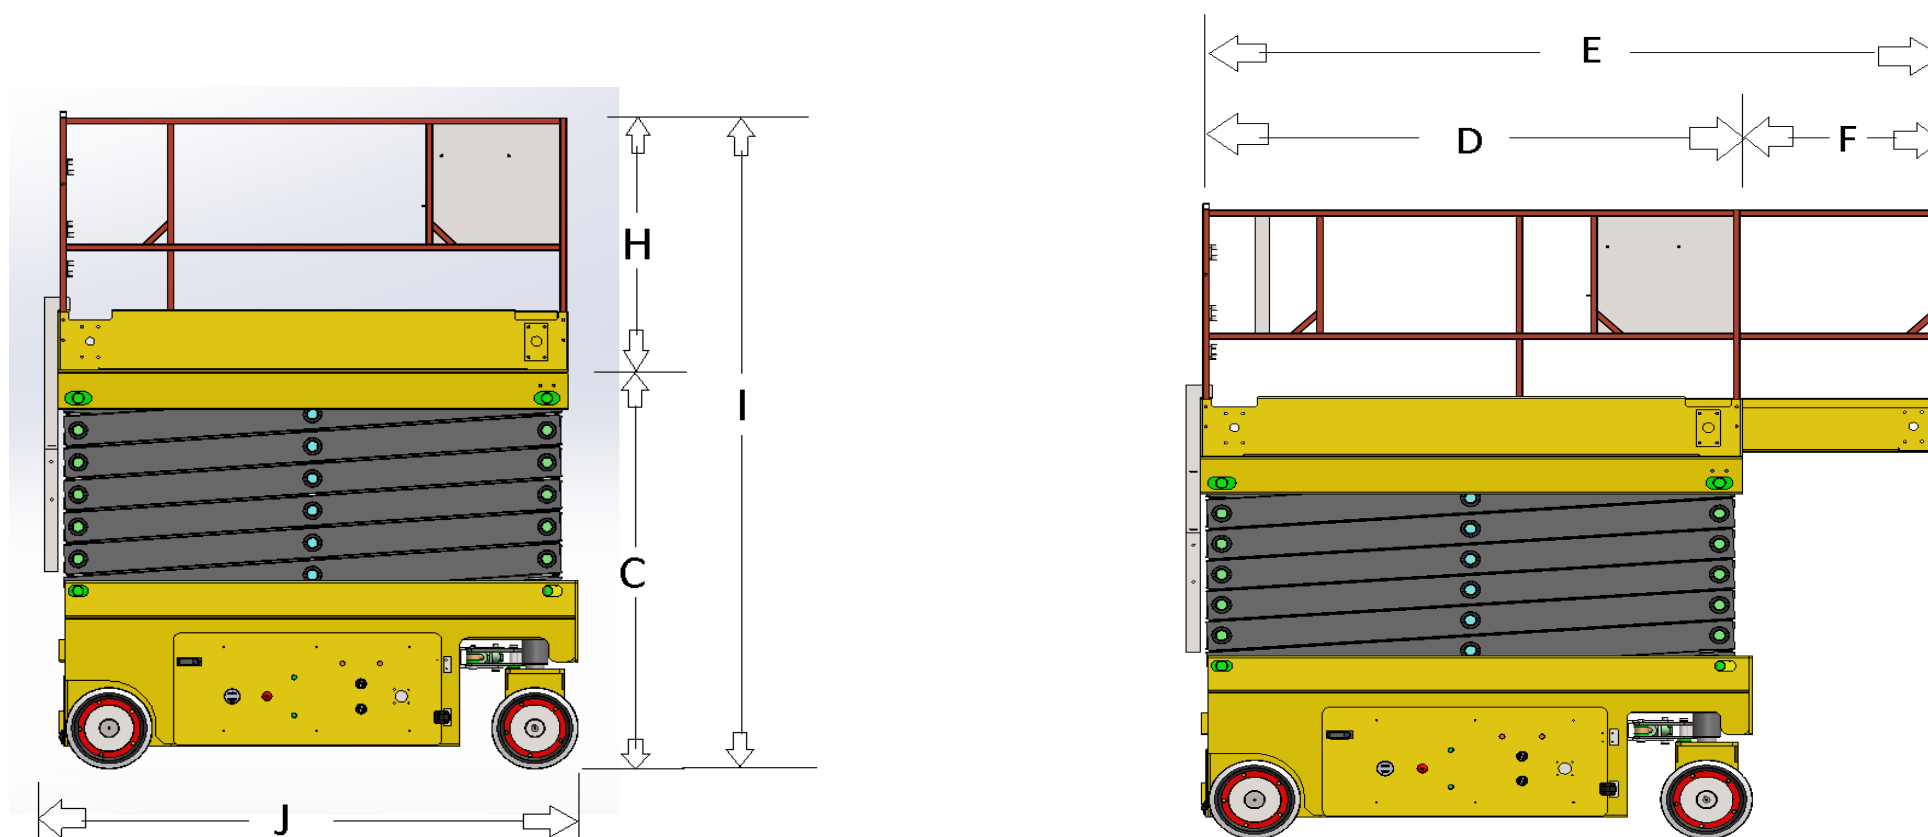


Fig. 3

* The metric equivalent of working height adds 2 m to platform height.

** Max Occupancy should not in any circumstances be more than 2

*** Weight will vary depending on options and/or country standards.

Note : Images are for reference only. They are not to be considered for actual visual appearance.